

Gigaset juhend

1) Ühendage seade ja vahetage administraatori parool

Vaikimisi parool: 0000


Settings -> Management -> Miscellaneous



Vajutage "SET"

2) Määrake kellaaeg

Settings -> Management -> Date and Time

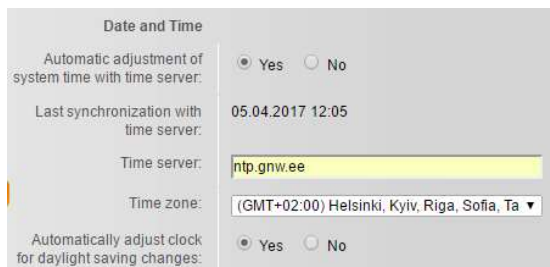


Vajutage "SET"

3) VOIP seadistused

Settings -> Telephony-> Connections



Vajutage "Show Advanced settings"

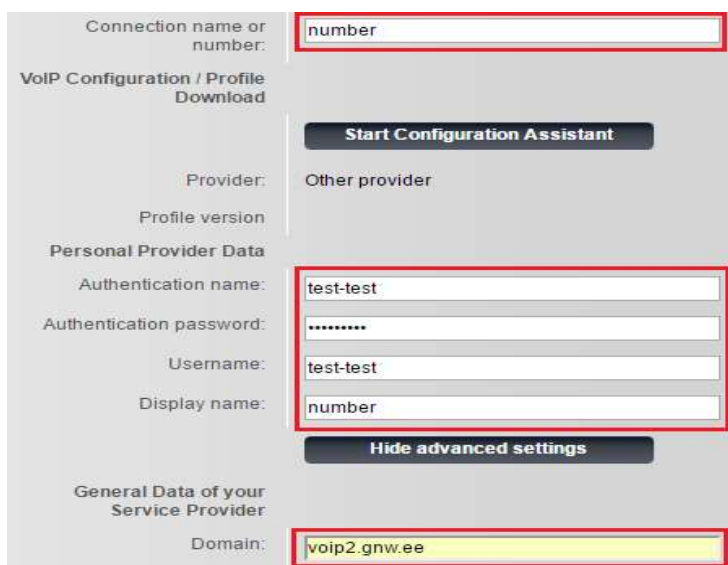

Vajutage "Update profile" ja "Set"

Settings -> Telephony-> Number Assignment

Handsets		
INT 1	Name	Connection
	Test	
		for outgoing calls
		for incoming calls
	6310742	<input checked="" type="radio"/>
	Gigaset.net	<input type="checkbox"/>
	Fixed line	<input type="checkbox"/>
Alternative Connection		
Alternative connection, if the VoIP connection is offline.		
Automatic fallback to fixed line: <input type="radio"/> Yes <input checked="" type="radio"/> No		

Vajutage "SET"